


Donut Fender


Donut Fender constructed 100% closed cell foam core, polyurethane skin with continuous nylon filaments. The internal casing has long-lasting, low-friction bearings which need minimal maintenance. The foam is unsinkable and cannot burst or deflate. **"Superior Guarantee, Supreme Guard"**



High Capacity Performance Data Sheet 60% Compression (±10% Tolerance)

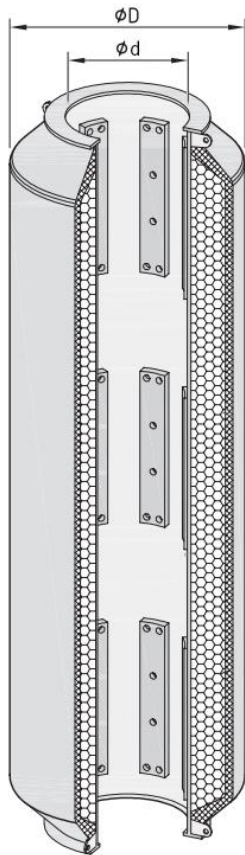

Fender Size ϕD (mm)	Max. Tube ϕd (mm)	Energy (kJ)	Reaction (kN)
900	457	3.8	110
1,270	610	11.3	182
1,450	710	14.4	206
1,520	762	16.5	220
1,780	914	22.1	254
1,910	995	25.7	275
2,030	1,067	29.2	292
2,210	1,185	35.0	320
2,290	1,219	37.1	330
2,490	1,345	44.0	360
2,540	1,372	46.0	367
2,790	1,524	55.4	402
2,970	1,639	63.0	429
3,050	1,676	66.1	440
3,300	1,829	77.7	477
3,450	1,933	85.7	501
3,530	1,981	89.8	513
3,810	2,134	103.5	550
3,960	2,241	113.2	575
4,060	2,286	117.9	587
4,220	2,388	127.6	611

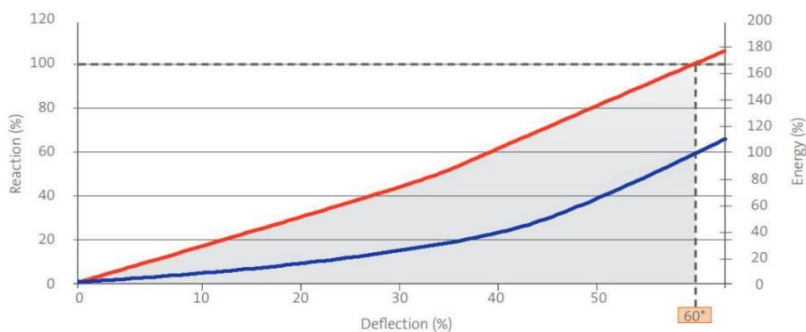

— Energy — Reaction

Fender energy, reaction, size, color, shape can be customized according to customer's requirements.