


Donut Fender


Donut Fender constructed 100% closed cell foam core, polyurethane skin with continuous nylon filaments. The internal casing has long-lasting, low-friction bearings which need minimal maintenance. The foam is unsinkable and cannot burst or deflate. **"Superior Guarantee, Supreme Guard"**



Low Capacity Performance Data Sheet 60% Compression (±10% Tolerance)

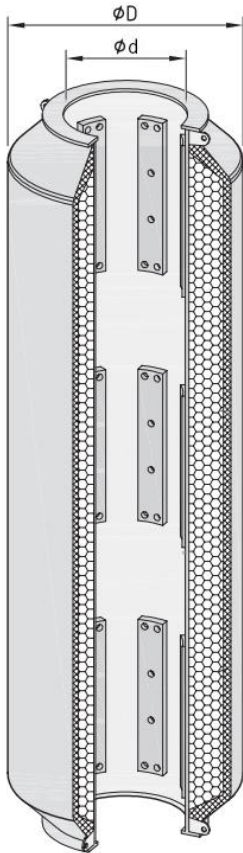

Fender Size ϕD (mm)	Max. Tube ϕd (mm)	Energy (kJ)	Reaction (kN)
900	457	1.5	40
1,270	610	4.2	68
1,450	710	5.4	77
1,520	762	6.2	82
1,780	914	8.3	95
1,910	995	9.6	103
2,030	1,067	10.9	109
2,210	1,185	13.1	120
2,290	1,219	13.9	124
2,490	1,345	16.5	135
2,540	1,372	17.2	138
2,790	1,524	20.8	151
2,970	1,639	23.6	161
3,050	1,676	24.8	165
3,300	1,829	29.1	179
3,450	1,933	32.1	188
3,530	1,981	33.6	192
3,810	2,134	38.8	206
3,960	2,241	42.4	215
4,060	2,286	44.2	220
4,220	2,388	47.8	229

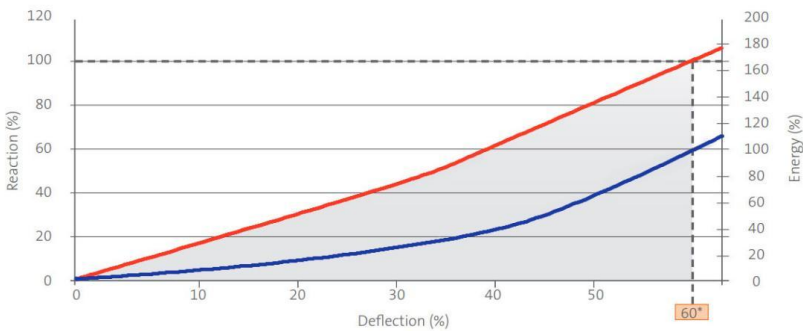

— Energy — Reaction

Fender energy, reaction, size, color, shape can be customized according to customer's requirements.