


Donut Fender


Donut Fender constructed 100% closed cell foam core, polyurethane skin with continuous nylon filaments. The internal casing has long-lasting, low-friction bearings which need minimal maintenance. The foam is unsinkable and cannot burst or deflate. **"Superior Guarantee, Supreme Guard"**



Standard Capacity Performance Data Sheet 60% Compression (±10% Tolerance)

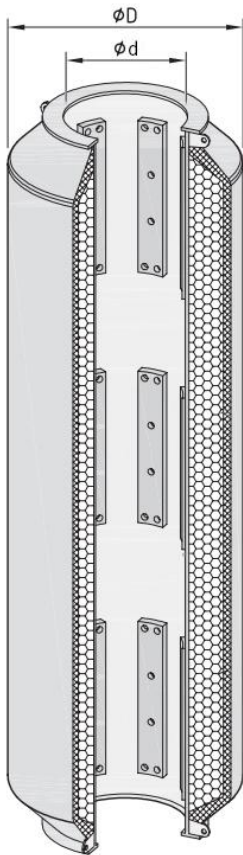

Fender Size ϕD (mm)	Max. Tube ϕd (mm)	Energy (kJm)	Reaction (kN)
900	457	2.4	69
1,270	610	7.2	116
1,450	710	9.2	131
1,520	762	10.5	140
1,780	914	14.1	162
1,910	995	16.4	175
2,030	1,067	18.6	186
2,210	1,185	22.3	204
2,290	1,219	23.6	210
2,490	1,345	28.0	229
2,540	1,372	29.3	234
2,790	1,524	35.3	256
2,970	1,639	40.1	273
3,050	1,676	42.1	280
3,300	1,829	49.5	304
3,450	1,933	54.6	319
3,530	1,981	57.2	327
3,810	2,134	65.9	350
3,960	2,241	72.1	366
4,060	2,286	75.1	374
4,220	2,388	81.3	389

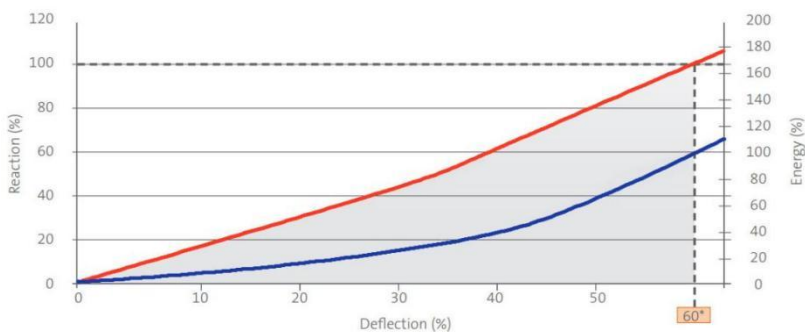

— Energy — Reaction

Fender energy, reaction, size, color, shape can be customized according to customer's requirements.